

PA-150.388.P



Brass full bore ball valve

Vanne à sphère à passage intégral

Kugelhahn mit vollem Durchgang




N. N.	DENOMINAZIONE PART NAME	MATERIALE MATERIAL	TRATTAMENTO TREATMENT
1	Corpo - Body	Ottone - Brass CW 617N - UNI EN 12165/98	Nichelato - Nickel plated
2	Manicotto - Body end	Ottone - Brass CW 617N - UNI EN 12165/98	Nichelato - Nickel plated
3	Seggio - Seat	PTFE	
4	Sfera - Ball	Ottone - Brass CW 617N - UNI EN 12165/98	Cromata - Chrome plated
5	Asta - Stem	Ottone - Brass CW 614N - UNI EN 12164/98	
6	O-Ring - O-Ring	NBR	
7	Rondella - Seal	PTFE	
8	Premistoppa - Packing nut	Ottone - Brass CW 614N - UNI EN 12164/98	
9	Maniglia - Handle	Acciaio - Steel	Rivest. PVC - Plastic coated
10	Dado - Nut	Acciaio - Steel	Zincato - Zinc plated

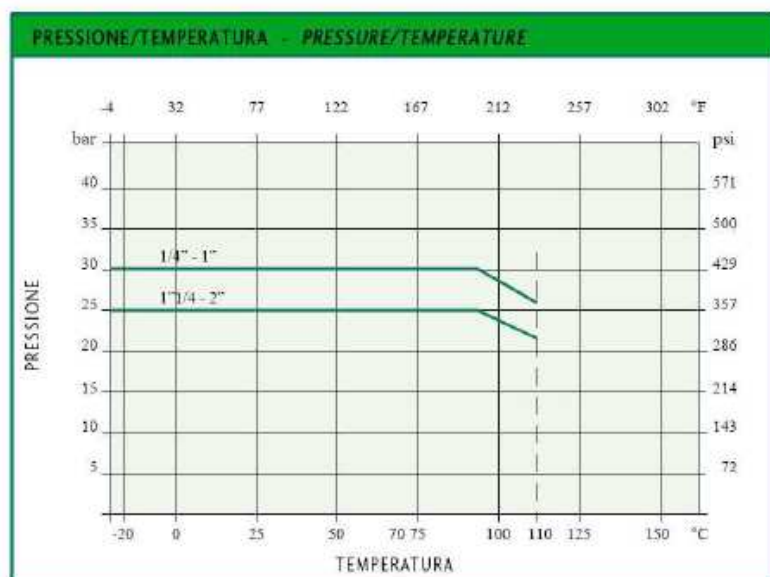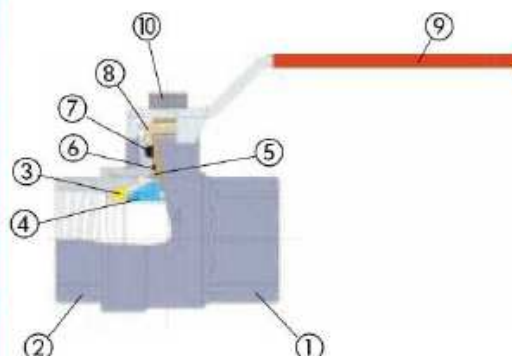

DATI TECNICI - TECHNICAL DATA		
Pressione di esercizio Working pressure	1/4" - 1" 1" 1/4 - 2"	32 bar 25 bar
Temperatura di esercizio Working temperature	-10°C + 110°C	
Filettatura estremità Threaded ends	UNI ISO 228/1	
Asta antiscoppio Anti blow-out stem		




ACS

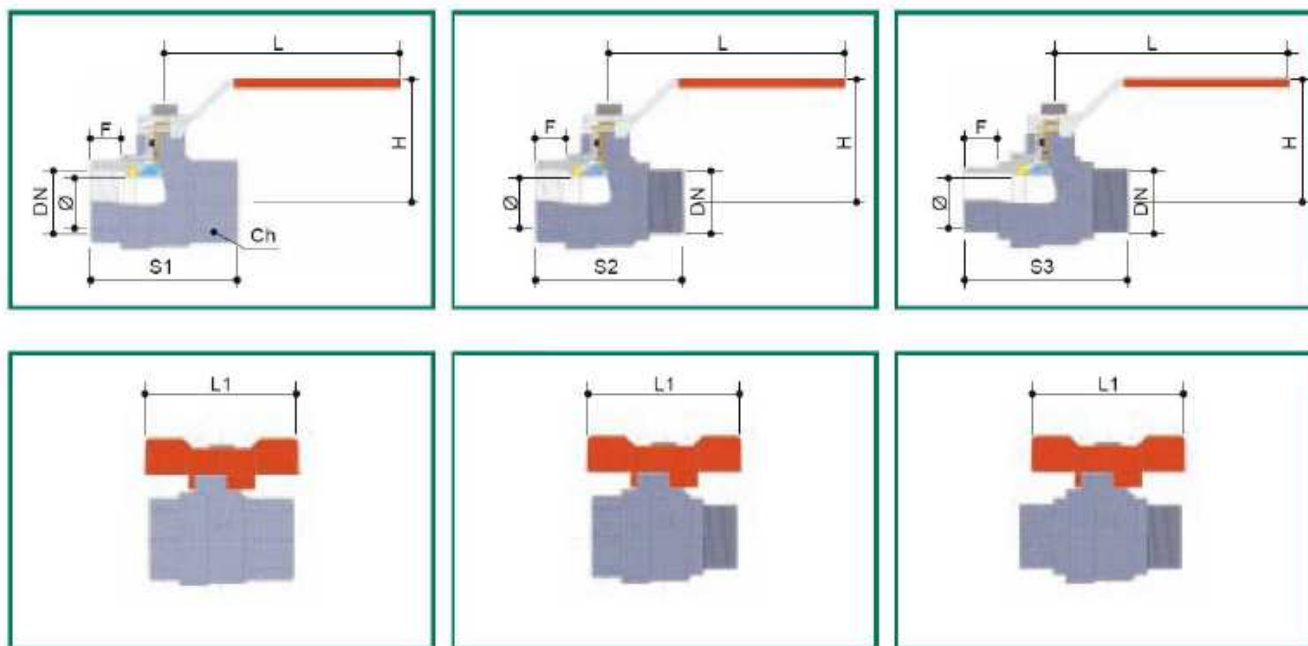

DN	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
Ø	10	10	15	20	25	32	40	50
F	9	9	11	13	15	17	18	20,5
S1	41	43	48	58	69	80	91	108
S2	48	48	48	58	69	80	91	108
S3		51	57	65	77	89	102	117
H	35	36	42	44	57	61	72	77
L	83	83	90	90	105	105	150	150
L1	52	52	52	52	62			
Ch	17	20	25	31	38	47	54	66

Dimensioni in mm - Dimensions in mm

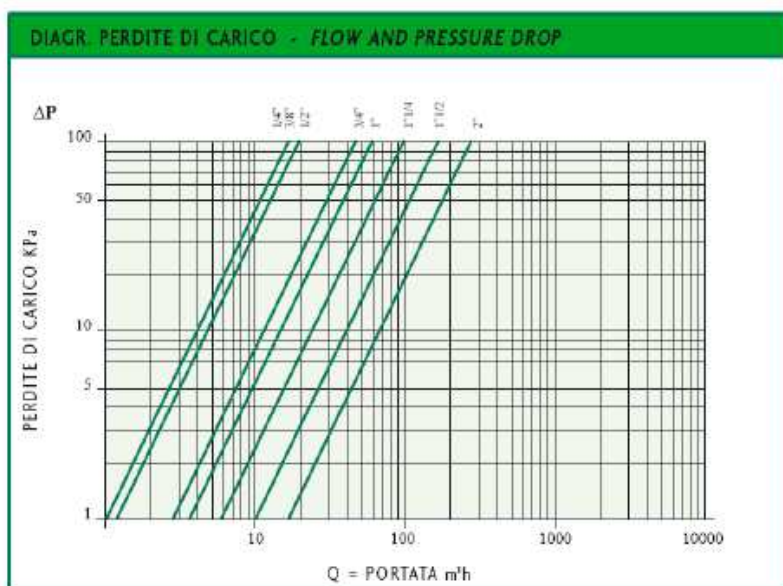

COEFFICIENTE KW - KW FACTOR

1/4" - 10	15
3/8" - 10	15
1/2" - 15	20
3/4" - 20	45
1" - 25	60
1 1/4" - 32	100
1 1/2" - 40	170
2" - 50	265